Solar control to defeat the heat

The control of the temperature and the management of heat are essential elements in maintaining a desired level of comfort within buildings. They are also critical elements for cost control and to maximize energy savings.

The products of the IR line absorb the part of the light rela-780 to 1400nm), blocking efletting the solar light through. The result is a reduction of the internal transmission of heat and a reduction of the cost for cooling the area. In fact all the products from the IR line can contribute to reduce the

temperature increase up to 25% while increasing the light transmission by up to 60% with respect to other window products. This represents a great advantage for building applications.

The lasting warrantee

All products from the line IR come with a written 10-year tive to the infra-red rays (from warrantee against the reduction of its characteristics relafectively the solar heat, while tive to light and solar transmissione, turning yellow and breakage caused by hail.





Polycarbonate line of filter of protection




how to avoid the heating effect of transparent surfaces



New product range

Le Policarb[®]IR, Policomp[®]IR sheets and arcoPlus[®]IR panels let light in but not heat. They make up dott. Gallina's new product range for transparent coverings and windows with solar control. All products of the IR line offer innovative so-

lutions for typical building applications where high levels of light are wanted while reducing the internal heating. The potential result: reduced energy spending for cooling and for lighting. The new Policarb IR sheets are available in all

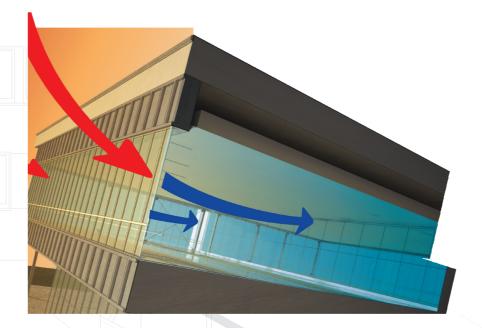

Medium temperature difference with solar light

Sheet with IR filter

30

35

Standard sheet



PoliComp

More comfort inside without giving up the advantages of natural illumination

thicknesses and dimensions. As for the multiwall sheets, also the modular arcoPlus IR panels offer and incredible design liberty, in applications such as skylights, tunnels, greenhouses, gazebos, thanks

to the wide range of available products.

Comparision to other products

30°

25°-

20°

15°-

10°

ŝ


There are similar products on the market, but this new technology permits the production of products with the

filter of protection against infrared only on the external surface, to avoid the complex heatingof the elements and consequent transmission of the heating to the inside.

Polycarbonate line of filter of protection





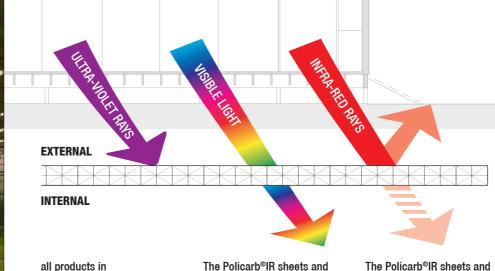


light.

all products in polycarbonate by dott galling are UV protected and block out the harmful ultraviolet radiation

modular arcoPlus®IR panels transmit a higer quantity of infra-red energy.



The heat coming from solar heating is for the most part absorbed by the external surface, treated with IR absorbers, that limits radiation to the inside of the building and the consequent heating up.





Based on the tests run, it can be evaluated that for the products used for those with a protective infra-red ray filter the internal heating can be reduced significantly.

The Policarb®IR sheets and modular arcoPlus®IR panels transmit to the inside less

